

ORWAK COMPACT 3075

The ORWAK COMPACT 3075 is perfect for companies with small amounts of packaging waste. The baler comes with a small footprint, yet produces impressive bales with a weight up to 70 kg and optimal size for fitting two bales on a Euro pallet.



Complies to
EN 16500
Safety standard

ORWAK



**SMALL
FOOTPRINT**

70 KG

**BALE WEIGHT
CARDBOARD**

ORWAK BENEFITS



MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY ORWAK COMPACT?

- Strong compaction on the spot! Requires little space, yet provides effective volume reduction
- Easy-to-handle light weight bales
- The best choice for small to medium size volumes of cardboard and plastic

ORWAK
PART OF SULO GROUP

ORWAK COMPACT 3075

Compact and versatile baler
– fits where you need it!

IDEAL LOGISTIC DIMENSIONS


Two bales fit perfectly on a Euro pallet and more layers of bales can be stacked to optimize a truck load

AUTOSTART FOR EFFICIENT COMPACTION

An autostart function allows the baler to start compacting the material as soon as you close the door.

BALE TROLLEY INCLUDED

Model 3075 is always delivered with a bale trolley for effortless baling and smooth internal transportation of the bale.

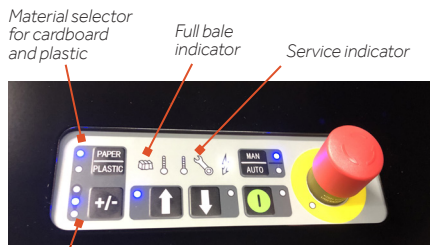

Adjustable bale size



- User-friendly panel
- Autostart
- Adjustable bale height in three sizes
- Bale trolley included

ORWAK COMPACT 3075 IS OPTIMIZED FOR:

PAPER

- Cardboard
- Shredded paper

PLASTIC FOIL

- Shrink film
- Plastic bags

OTHER METALS

- Steel straps

OTHER PLASTICS

- Plastic straps

SILENT OPERATION CONTRIBUTES TO A BETTER WORKING ENVIRONMENT

Thanks to a silent type of hydraulics, the sound emission is low, which contributes to improving the working environment for the employees and is an important feature if the baler is installed close to customers.

ORWAK CONNECT COMMUNICATION

The COMPACT balers are ready to communicate when choosing the option Orwak Connect. It is a modem-based communication service enabling the baler to send updates and alerts to the caretaker as well as vital information and bale statistics to the web portal.


Complies with the EN 16500:2014 safety requirement standard for vertical balers

DIMENSIONS & SPECIFICATIONS

DIMENSIONS

A	B	C	D	E
2350 mm*	920 mm	717 mm	1460 mm	794 mm

*Transport height 1980 mm on demand

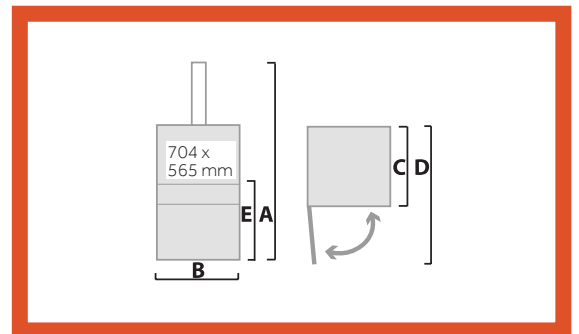

TECHNICAL SPECIFICATIONS

LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	MACHINE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 704 mm Height: 565 mm	40 secs	HP: 4 ton, 40 kN LP: 3 ton, 30 kN	Width: 700 mm Depth: 500 mm Height: 700 mm	Cardboard: Up to 70 kg Plastic: Up to 70 kg	277 kg	62.3 db (A)	IP 55	Single Phase 230 V, 50 Hz, 10 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

Umbúða gerðin

UMBUDAGERDIN

Reykjavíkurvegur 70
220 Hafnarfjörður
ICELAND
Phone: +354 588 4440
E-mail: umbudagerdin@umbudagerdin.is

UMBUDAGERDIN.IS

ORWAK
PART OF SULO GROUP